KRAMER ELECTRONICS, Ltd.
www.kramerelectronics.com

CP-GM/5BM (M)

15−pin HD to 5 BNC Molded Plenum Breakout Cable

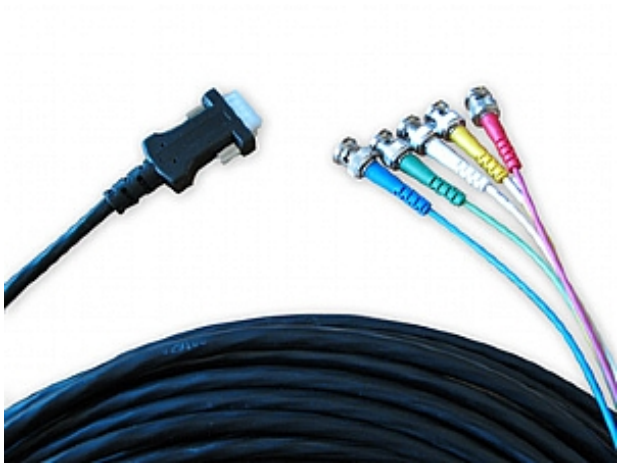

Kramer's CP−GM/5BM (M) series premium quality cables are constructed of plenum 5 mini coax cable terminated with a molded 15−pin HD connector at one end, and 5 BNCs at the other. They offer outstanding durability and high performance for any computer graphic video signal application where a plenum rating is required.

FEATURES

- Quality Construction - Constructed from flexible, high−quality plenum rated cable containing 5 mini coaxes. BNCs are premium quality true 75Ω.
- Plenum Rated - The low smoke and fire−resistant properties of plenum rated cable allow it to reside in air return spaces of ceiling, floors, and walls, often saving the cost of installing conduit.
- Numerous Applications - Ideal for applications requiring passive breakout from 15−pin to RGBHV. Ideal for routing typical computer video and audio signals in professional AV systems.
- Cable Specs - For detailed specs, see Kramer BCP−5X bulk cable.
- Varied Selection of Lengths - Available in versions of 3.0 to 30.5m (10, 15, 25, 35, 50, 75, 100ft).

Model Male - Male	Description	Length	Meter
CP-GM/5BM-10 (M)	Molded 15-pin HD (M) to 5 BNC (M) Plenum Breakout Cable	10'	3.0M
CP-GM/5BM-15 (M)	Molded 15-pin HD (M) to 5 BNC (M) Plenum Breakout Cable	15'	4.6M
CP-GM/5BM-25 (M)	Molded 15-pin HD (M) to 5 BNC (M) Plenum Breakout Cable	25'	7.6M
CP-GM/5BM-35 (M)	Molded 15-pin HD (M) to 5 BNC (M) Plenum Breakout Cable	35'	10.7M
CP-GM/5BM-50 (M)	Molded 15-pin HD (M) to 5 BNC (M) Plenum Breakout Cable	50'	15.2M
CP-GM/5BM-75 (M)	Molded 15-pin HD (M) to 5 BNC (M) Plenum Breakout Cable	75'	22.9M
CP-GM/5BM-100 (M)	Molded 15-pin HD (M) to 5 BNC (M) Plenum Breakout Cable	100'	30.5M